


G 460 14-18t

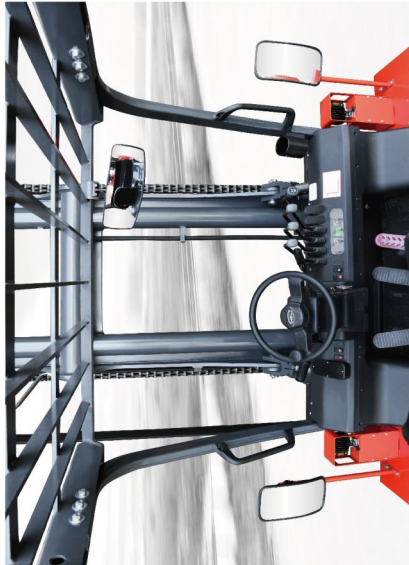

### 宽视野、高强度起重系统 Wide View and High Strength Lifting System

- 具有更强更宽的视野门架与货叉系统，为操作者提供更佳的视野，有利于工作安全性的改善及工作效率的提高。
- Excellent front view which is benefit for the work safety improvement and working efficiency is provide with high strength wide view mast and fork postioner with safe lifting.

www.helichina.com


### 发动机系统 Engine System

- 搭载康明斯QTAAS-C-70柴油发动机，额定功率：127KW/2200rpm，最大扭矩：127KW/2200rpm，750N.m/1400rpm，油耗低，噪音低，动力输出强劲。
- Dongfeng Cummins QTAAS-C-70 diesel engine meets the requirements of low fuel consumption, low noise and stable output power. Parameters: 127kw/2200rpm 750N.m/1400rpm Fuel system: 127kw/2200rpm 750N.m/1400rpm meets the requirements of low fuel quality factor.



### 变速箱+变矩器 Gearbox&Torque Converter

- 液力耦合变矩器+340高性能变速箱
- 电控换挡技术
- 电控换挡系统
- 安全可靠的换挡系统
- Hydraulic powered direction changing transmission box+ 340 high performance torque converter
- Electric hydraulic gear shifting technology
- Safe and reliable low noise



### 重载驱动桥 Heavy drive axle

- 针对叉车特殊工况设计，采用大轴和小主减结构，驱动桥高可靠性的保证，性能稳定，拥有良好的耐用性和性价比。
- The design is suited to special working conditions of forklift by using big axial axle and small main reducer, ensuring high reliability of drive axle. Equipped with larger disc brake, it has good performance and high load performance.

重载桥 重载驱动桥




### 制动性能优越 Excellent Braking Performance

- 整车制动系统，可靠的制动性能，在各种复杂条件下，行车制动和驻车制动均能正常工作。
- The vehicle has excellent and reliable braking performance and the service brake and parking brake are operated smoothly and stably under various field conditions.


### 液压系统 Hydraulic system

- 采用意大利沃孚尔集成阀块式换向阀，美国FERMOCO高压泵。
- Wawol Lever-operated integrated type control valve from Italy, FERMOCO high pressure gear pump.



HELI 合力

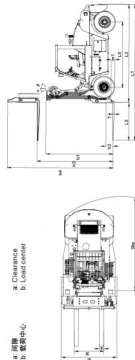

[illegible]

| 门型架主要尺寸 (mm) Main frame basic type (mm) |                               |                                           |         |         |         |          |         |            |           |                       |      |
|-----------------------------------------|-------------------------------|-------------------------------------------|---------|---------|---------|----------|---------|------------|-----------|-----------------------|------|
| 门架型式<br>Frame type                      | 门架高度<br>Loading capacity (mm) | 主要螺栓力矩值(N·400mm)<br>Loading capacity (mm) |         |         |         | 门架净高(总高) |         | 门架净宽(前/后)  |           | 备注<br>Notes           |      |
|                                         |                               | CPC-H40                                   | CPC-H50 | CPC-H60 | CPC-H80 | CPC-H40  | CPC-H80 | Front (mm) | Back (mm) | 标准型式<br>Standard type |      |
| 标准型式                                    | 4400                          | 3000                                      | 14000   | 10000   | 10000   | 10000    | 10000   | 3200       | 6" 1/2"   | 6" 1/2"               | 标准型式 |
|                                         | 4650                          | 3500                                      | 14000   | 10000   | 10000   | 10000    | 10000   | 3500       | 6" 1/2"   | 6" 1/2"               |      |
|                                         | 4400                          | 4000                                      | 14000   | 15000   | 10000   | 10000    | 10000   | 3700       | 6" 1/2"   | 6" 1/2"               |      |
|                                         | 4400                          | 4500                                      | 14000   | 15000   | 10000   | 10000    | 10000   | 4000       | 6" 1/2"   | 6" 1/2"               |      |
| 加长型式                                    | 4650                          | 5000                                      | 14000   | 15000   | 10000   | 10000    | 10000   | 4200       | 6" 1/2"   | 6" 1/2"               | 加长型式 |
|                                         | 4650                          | 5500                                      | 13000   | 14000   | 10000   | 10000    | 10000   | 4500       | 3" 3/4"   | 3" 3/4"               |      |
|                                         | 4600                          | 6000                                      | 13000   | 14000   | 10000   | 10000    | 10000   | 4700       | 3" 3/4"   | 3" 3/4"               |      |
|                                         | 4600                          | 6500                                      | 11000   | 12000   | 10000   | 10000    | 10000   | 5000       | 3" 3/4"   | 3" 3/4"               |      |



地址 / 中国 合肥方兴大道668号  
 Add / No.668, Fangxing Road,Hefei, China  
 邮编 / Post Code / 230009  
 邮购 / E-MAIL / Sale-HVE@hnlchina.com  
 客服热线 / Customer Service Hotline / 4001-600761  
 服务电话 / Service Tel / +86-511-33689111, 33689365  
 传真 / Fax / +86-511-33689365

[illegible]

# 14-18t



● [www.helichina.com](http://www.helichina.com)

[illegible][illegible]

| 選購注意事項附選Optional Devices and Accessories |                                                                                       |
|------------------------------------------|---------------------------------------------------------------------------------------|
| 散熱式乾衣器<br>Ventilator drier               | 附件<br>Dryer cord                                                                      |
| 空調<br>Air conditioner                    | 控制系統和遙控器 (遙控器選購)<br>Remote control and remote (remote optional)                       |
| 專用遙控器<br>Air chiller                     | 吊架式安裝 (吊架選購)<br>Bracket style shelf from positioner (shelf adjustment of single lock) |
| 普通遙控器<br>Common solid type               | 無噪音功能<br>No noise solid type                                                          |
| 靜音型遙控器<br>Silent remote                  | 靜音型遙控器<br>No noise solid type                                                         |
| 吊架<br>Cable                              | 吊架選購<br>Shelf extender                                                                |